

ECCENTRIC SWAGE NIPPLES




Specification: MSS SP-95 Threaded ends per ASME B1.20.1 • Beveled ends per ASME B16.25

Material: Available in a complete range of Carbon Steels, Stainless Steels, Alloy Steels and Non-ferrous metals certified to ASTM, ASME, and Military standards.

Sizes: 1/4" - 8" in S40/STD, S80/XH, S160 & XXH
Also available in special pipe schedules and split schedules

End Connections: Plain, Threaded, Beveled, Grooved

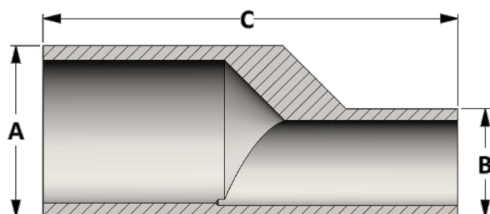

All dimensions are in inches • Weights are based on Carbon Steel

Pipe Size	Dimensions			Weights			
	A	B	C	STD	XH	S160	XXH
1/4	1/8	0.540	0.405	2.250	0.08	0.10	0.11
	1/8	0.675	0.405	2.500	0.13	0.15	0.18
3/8	1/4	0.675	0.540	2.500	0.13	0.16	0.19
	1/8	0.840	0.405	2.750	0.21	0.25	0.28
1/2	1/4	0.840	0.540	2.750	0.21	0.25	0.28
	3/8	0.840	0.675	2.750	0.20	0.24	0.29
3/4	1/2	1.050	0.405	3.000	0.32	0.37	0.44
	1/4	1.050	0.540	3.000	0.31	0.37	0.44
1	3/8	1.050	0.675	3.000	0.30	0.36	0.45
	1/2	1.050	0.840	3.000	0.29	0.37	0.45
1-1/4	1/8	1.315	0.405	3.500	0.61	0.69	0.80
	1/4	1.315	0.540	3.500	0.59	0.68	0.79
1-1/2	3/8	1.315	0.675	3.500	0.56	0.67	0.78
	1/2	1.315	0.840	3.500	0.54	0.64	0.77
2	3/4	1.315	1.050	3.500	0.48	0.60	0.76
	1/8	1.660	0.405	4.000	0.97	1.11	1.25
2-1/2	1/4	1.660	0.540	4.000	0.95	1.09	1.24
	3/8	1.660	0.675	4.000	0.91	1.06	1.23
3	1/2	1.660	0.840	4.000	0.88	1.04	1.21
	3/4	1.660	1.050	4.000	0.83	1.00	1.21
3-1/2	1	1.660	1.315	4.000	0.80	1.00	1.24
	1/8	1.900	0.405	4.500	1.38	1.57	1.81
4	1/4	1.900	0.540	4.500	1.34	1.55	1.81
	3/8	1.900	0.675	4.500	1.30	1.51	1.79
4-1/2	1/2	1.900	0.840	4.500	1.25	1.48	1.76
	3/4	1.900	1.050	4.500	1.18	1.42	1.74
5	1	1.900	1.315	4.500	1.13	1.39	1.75
	1-1/4	1.900	1.660	4.500	1.05	1.36	1.72

Pipe Size	Dimensions			Weights			
	A	B	C	STD	XH	S160	XXH
1/2	1/8	2.375	0.840	6.500	2.55	3.06	4.51
	3/4	2.375	1.050	6.500	2.43	2.98	4.48
2	1	2.375	1.315	6.500	2.33	2.88	4.50
	1-1/4	2.375	1.660	6.500	2.18	2.77	4.53
2-1/2	1-1/2	2.375	1.900	6.500	2.09	2.73	4.61
	3/4	2.875	1.050	7.000	3.45	4.23	5.22
3	1	2.875	1.315	7.000	3.32	4.13	5.16
	1-1/4	2.875	1.660	7.000	3.16	4.01	5.04
3-1/2	1-1/2	2.875	1.900	7.000	3.09	3.96	5.09
	2	2.875	2.375	7.000	3.02	3.99	5.38
4	1	3.500	1.315	8.000	6.01	7.20	8.98
	1-1/4	3.500	1.660	8.000	5.65	6.88	8.66
4-1/2	1-1/2	3.500	1.900	8.000	5.41	6.70	8.59
	2	3.500	2.375	8.000	5.03	6.42	8.64
5	1-1/2	3.500	2.875	8.000	5.07	6.60	8.77
	2-1/2	4.000	1.900	8.000	7.23	8.82	13.65
6	2	4.000	2.375	8.000	6.63	8.32	13.39
	2-1/2	4.000	2.875	8.000	6.43	8.24	13.84
7	3	4.000	3.500	8.000	6.10	8.14	14.39
	1-1/2	4.500	1.900	9.000	9.76	11.79	15.25
8	2	4.500	2.375	9.000	8.98	11.13	14.96
	2-1/2	4.500	2.875	9.000	8.69	10.98	14.71
9	3	4.500	3.500	9.000	8.19	10.75	15.05
	3-1/2	4.500	4.000	9.000	8.00	10.83	19.35
10	3	6.625	3.500	12.00	27.91	34.08	44.58
	3-1/2	6.625	4.000	12.00	25.94	32.39	49.77
12	4	6.625	4.500	12.00	24.16	30.93	42.90
	5	6.625	5.563	12.00	20.96	28.63	42.87



Phone: (587) 410-8373
8524 Roper Road NW
Edmonton AB, T6E 6V4

For More Information Visit our Website at:
www.titanflowproducts.com